TheMagicTouch®
WOW - Dark

Instruction Sheet



PRINT


Software Open your design
Media selection TheMagicTouch WOW - Dark MSheet
Print Print face up
Do not mirror image

PRE-HEAT

Application Place theMagicTouch T-Pad smooth side up


Temperature 145 °C / 295° F
Time 10 seconds
Pressure High Pressure


Press To heat up the lower platen and TheMagicTouch T-Pad

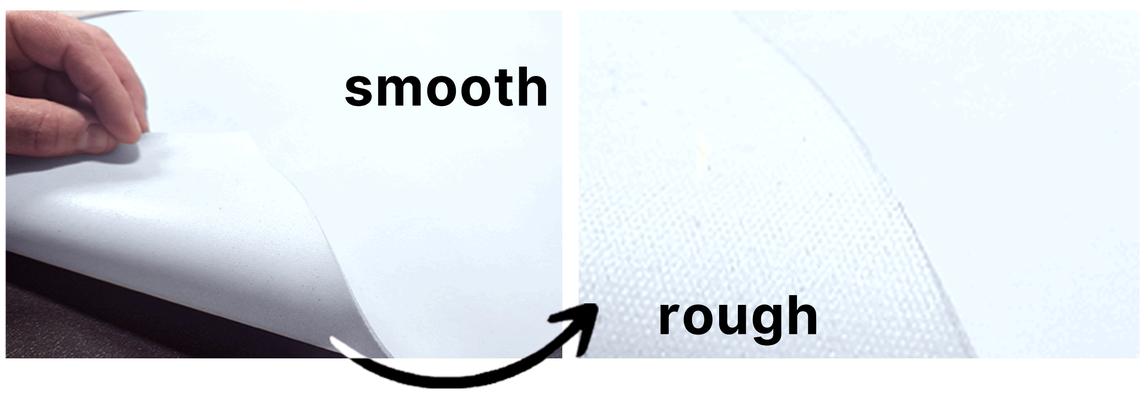

STEP 1

Application **(1)** TheMagicTouch T-Pad must be warm
(2) Place yellow sheet (TSheet) face up
(3) Place your magenta sheet (MSheet) with printed side face down on top of yellow sheet (TSheet)
(4) Cover with TheMagicTouch Release Paper

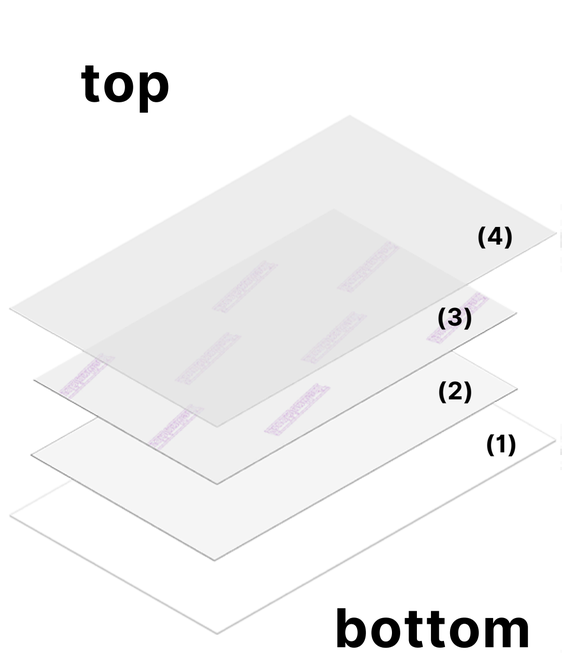

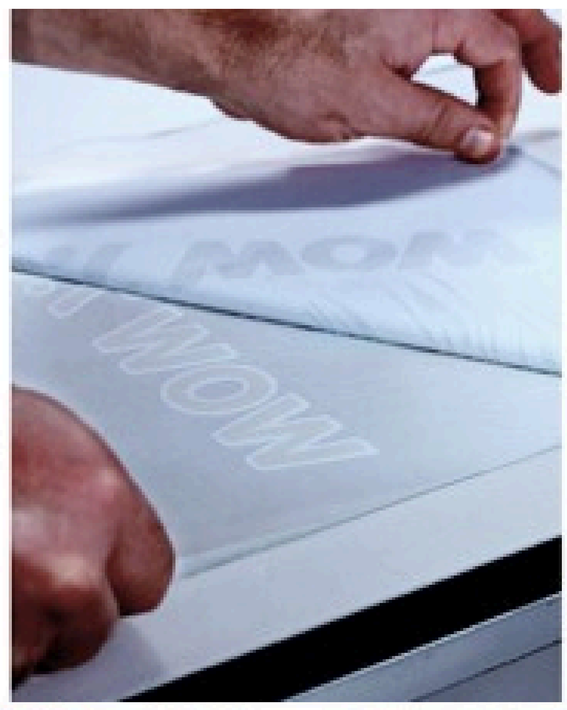


Temperature 145 °C / 295 °F
Time A4: 45 seconds | A3: 60 seconds
Pressure High Pressure

Press To apply the transfer to the yellow sheet (TSheet)

Transfer removal Leave TheMagicTouch Release Paper on magenta sheet (MSheet)
Immediately peel magenta sheet (MSheet) in smooth, flat, constant movement

STEP 2

Application Place your garment on the Heat Press
Place yellow sheet (TSheet) face down
Cover with TheMagicTouch Release Paper

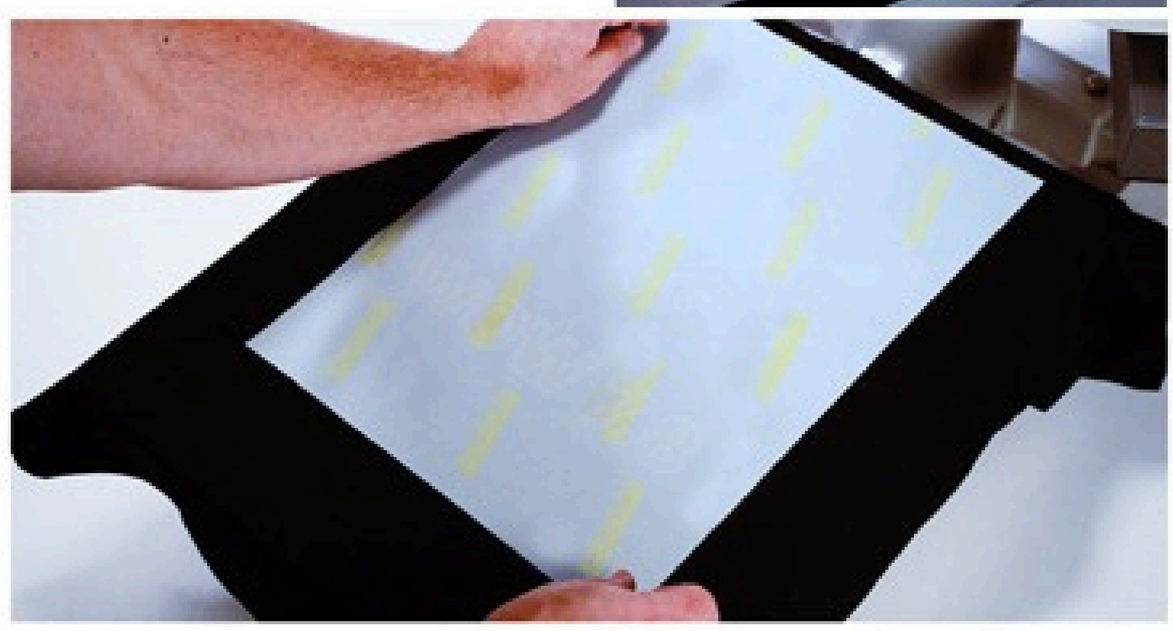

Temperature 145 °C / 295 °F
Time 5 seconds
Pressure High Pressure

Press To apply the transfer on the fabric

Transfer removal Cold Peel


STEP 3

Application Cover Print with TheMagicTouch T-Seal face down

Temperature 145 °C / 295 °F
Time 20 seconds
Pressure High Pressure

Press To seal transfer into the fibers of the fabric

Transfer removal Cold Peel

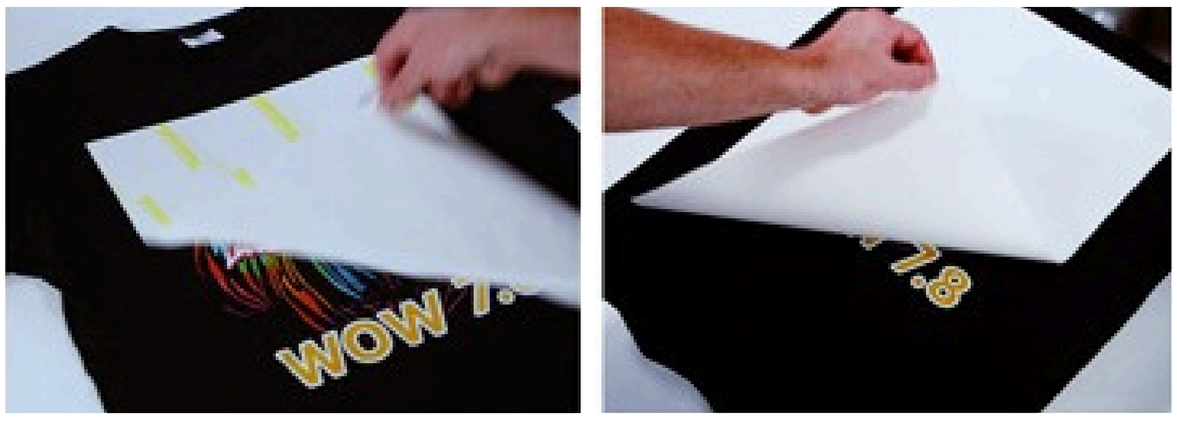

NOTES:

- Only use with white toner printers. Local set-up can have an effect on time and temperature settings and end results.
- We highly recommend that before every usage of production runs, a test should be conducted on the specific fabric.
- Keep stored dry and at room temperature.
- First wash after 48 hours only, washing up to 40°C, do not use fabric softener/liquid detergent, or a high RPM. Do not tumble dry.